
Electric Halogen Patio Heater Operating Instructions



Please Keep These Instructions For Future Reference

IMPORTANT: Ensure all instructions are read before use.

- · Keep out of reach from children at all times.
- Ensure that your heater is disconnected and has been allowed to cool before cleaning or handling.
- Do not obstruct the heater or cover the heater in any way when the heater is in use.
- Ensure that the mains cable is not touching the outer casing of the heater.
- Ensure that this unit is only switched on once the installation process has been completed.
- Do not use an extension cable to power this unit as this could cause the unit to overheat and a risk of fire.
- Ensure that you do not touch the heater when in use always turn of the unit and allow to cool.
- Ensure that your electricity supply voltage corresponds with the stated voltage for this heater.
- Always ensure that the unit is disconnected from the mains power supply when fitting or replacing the halogen element.
- Ensure that the halogen element has cooled down before replacement.
- Do not handle the halogen element with bare hands as moisture can shorten the life of the element.
- Do not use this heater with a programmer, timer or any other device that switches the heater on automatically, since a fire risk exists if the heater is covered or positioned incorrectly.
- . Do not insert any object through any slot or opening in the heater.
- Users must not disassemble the products, or change any parks of the heater. If the heater is broken, please do not use.
- Keep combustible materials such as furniture, paper, clothes and curtains at least 1.5m from of the header and away from the sides and rear. Do not use this heater in the immediate surroundings of a bath, a shower or a swimming pool

Technical Specification

Voltage	AC220V~240V
Total Power (kW)	1.0
Phase Supply	Single 220V~240V
Minimum Mounting Height From Floor	2.75 Metres
Minimum Distance From Ceiling	0.5 Metres
Minimum Distance From Side Walls	1.5 Metres
Unit Dimensions – W x H x D	345x250x170mm
Ingress Protection	IP44
Element Type	1000 Watt

Mounting & Positioning



Remove the mounting brackets by unscrewing the 2 bolts and nuts.



Ensure that the heater is mounted at a safe distance away from any flammable surface and that the unit is mounted on a non-flammable surface.



Once a suitable location has been selected, fix the bracket securely in the desired location.



Position the heater to your desired angle using the bolts on either side of the bracket. Once positioned to a desired angle, ensure that the bolts are fully tightened.

Replacing the Halogen Element



Ensure that the unit has cooled and is switched off at the mains and unplugged. Remove the screws from the unit, these are located on the top of the units casing.




Carefully open the glass front and place onto a smooth flat surface.





Locate the halogen element into the Lamp holder, push at either end to affix into place. Ensuring that the element is not touched with bare hands.

Replacing the Halogen Element . Cont.



Once the halogen element has been replaced correctly locate the front of the unit back into place and tighten the screws ensuring a water tight seal is achieved.

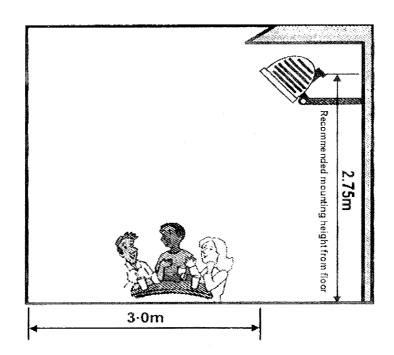



Always make sure that the unit is plugged into a waterproof socket.

If in any doubt consult a professional electrician.

Maintenance & Cleaning

- 1. Always ensure that the appliance is disconnected from the mains before any maintenance or cleaning is attempted.
- 2. After approximately 100 hours it is recommended that the front cover of the unit is opened and the inside of the glass and reflector is cleaned with a lint-free cloth. Always make sure that the unit has been allowed to cool before this action is taken.
- 3. If the inside of the glass or the reflector shows a milky colouring, this is normal due to internal vapours. To clean this open the front cover and clean the glass and the reflector with a lint free cloth.

Note

All measurements & Dimensions of this product are approximate and due to the company's policy of research & development can be subject to change without prior notice.

Gala Tent Ltd.
Unit 1, Park Springs
Springvale Road
Barnsley, Sth Yorkshire
S72 7BQ

www.galatent.co.uk

Telephone: 0870 4994256

Gala Tent Ltd.
Unit 1,Park Springs
Springvale Road
Barnsley, Sth Yorkshire
S72 7BQ

Telephone: 0870 4994256

www.galatent.co.uk